


STANDARD	NIJ 0101.06
NIJ MODEL	GPXIIIA
SERIES	EX01
THREAT LEVEL	IIIA
GENDER	Male
AREAL DENSITY	0.90 psf
THINNESS	0.28"
PLY COUNT	29
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/ Spectra Shield® Hybrid
STITCHING	Top Stitch, Bottom Stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years



Twaron®
The power of Aramid
Honeywell

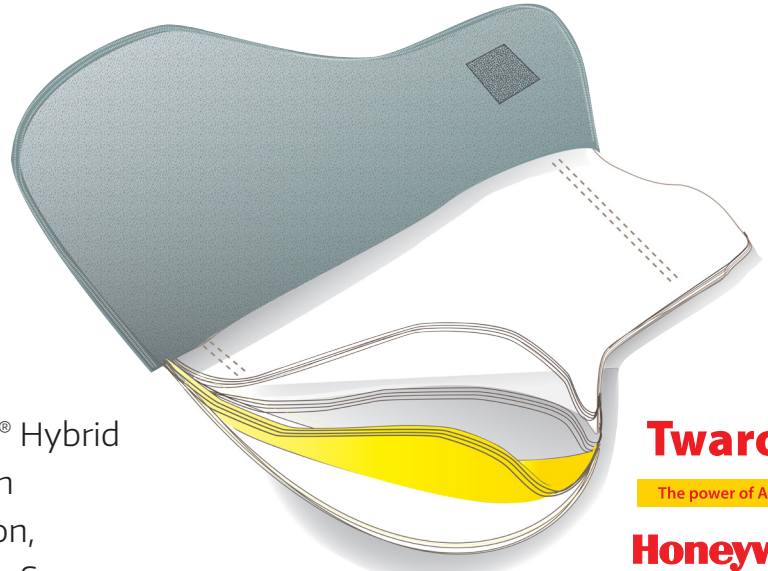

BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1855 fps	.44 Mag New V50	1726 fps
.357 Sig Conditioned V50	1781 fps	.44 Mag Conditioned V50	1670 fps
.357 Sig BFS	27.9 mm	.44 Mag BFS	35.3 mm
.357 Sig New RPI	2094.4	.44 Mag New RPI	1917.8
.357 Sig Conditioned RPI	1978.9	.44 Mag Conditioned RPI	1855.6

SPECIAL THREAT TESTING

Winchester 9mm 127gr SXT +P+ RA9TA | Speer .357 SIG 125gr GDHP
 FN 5.7mm X 28mm 27gr HP SS195LF | FN 5.7mm X 28mm 40gr Blue-Tip SS197SR
 Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
 (866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.