




ProX II PX03


TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL
II

STANDARD	NIJ 0101.06
NIJ MODEL	BA-2000S-MR01F
SERIES	PX03
THREAT LEVEL	II
GENDER	Structured
AREAL DENSITY	1.00 psf
THINNESS	0.24"
SIZE RANGE	C1-C5
COMPOSITION	Honeywell Gold Shield 2117, Honeywell Gold Flex, Teijin Twaron
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

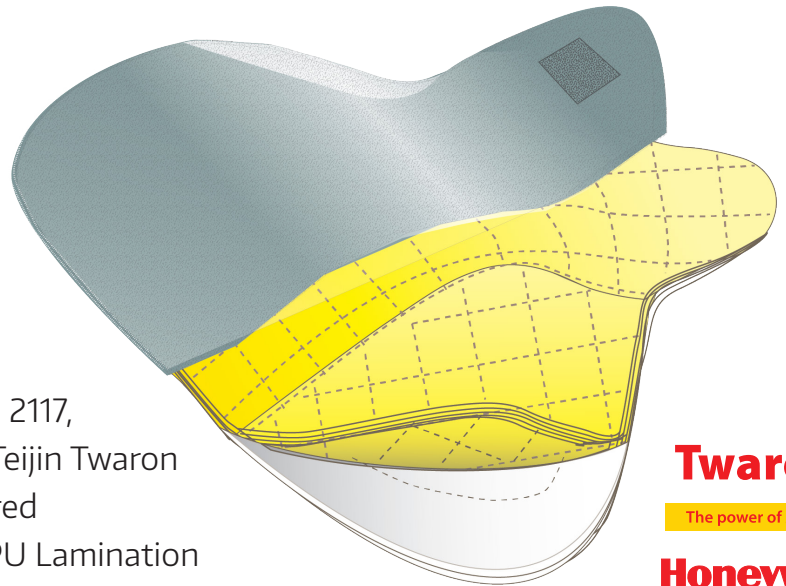

Twaron®
The power of Aramid
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1679 fps	.357 Mag New V50	1635 fps
9mm Conditioned V50	1720 fps	.357 Mag Conditioned V50	1579 fps
9mm BFS	27.91 mm	.357 Mag BFS	32.55 mm
9mm New RPI	1679.0	.357 Mag New RPI	1635.0
9mm Conditioned RPI	1720.0	.357 Mag Conditioned RPI	1579.0

SPECIAL THREAT TESTING

9mm 127 gr. +P HST | 9mm 127 gr. +P+ SXT | .357 Sig 125 gr. GDHP | .40 S&W 165 gr. SXT
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.