




# ProX IIIA PX03FO

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**IIIA**

STANDARD	NIJ 0101.06
NIJ MODEL	BA-3A00Z-MR01
SERIES	PX03FO
THREAT LEVEL	IIIA
GENDER	Neutral (Front Opening)
AREAL DENSITY	1.24 psf
THINNESS	0.29"
SIZE RANGE	C1-C5
COMPOSITION	Tiejin Twaron (Woven 3000D), Honeywell UD, Barrday Laminato
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

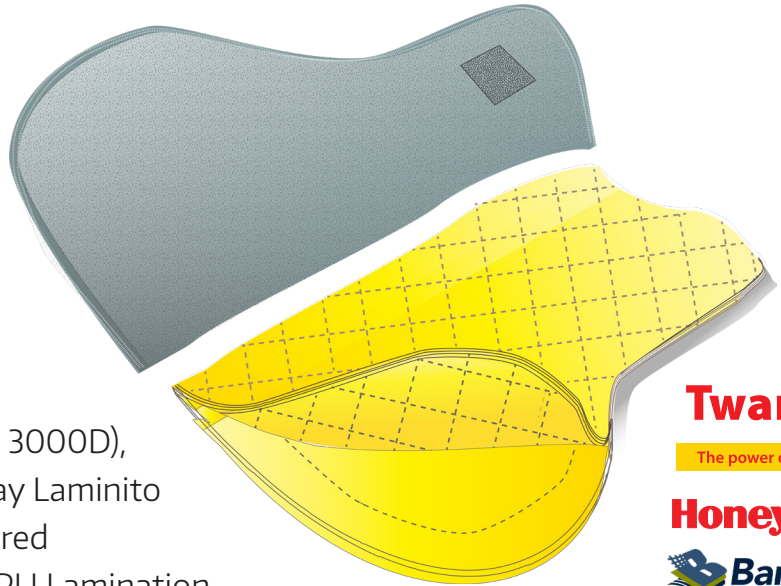

**Twaron**<sup>®</sup>

The power of Aramid

**Honeywell**

**Barrday**  
ADVANCED MATERIAL SOLUTIONS



## BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1784 fps	44 Mag New V50	1655 fps
.357 Sig Conditioned V50	1788 fps	.44 Mag Conditioned V50	1619 fps
.357 Sig BFS	28.92 mm	.44 Mag BFS	36.96 mm
.357 Sig New RPI	1438.7	.44 Mag New RPI	1334.7
.357 Sig Conditioned RPI	1441.9	.44 Mag Conditioned RPI	1305.6

## SPECIAL THREAT TESTING

9mm, 127 gr. +P+ SXT (RA9TA) | 7.62x25mm 85Gr. FMJ Romanian Tokarev | Fragmentation 2, 4, 16, 64gr FSP  
FN 5.7x28mm, 40 gr. SS197 Sporting Round, Blue-Tip | FN 5.7x28mm, 28 gr. SS195LF Hollow Point

Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058  
(866) 920-5940 | [www.gharmorsystems.com](http://www.gharmorsystems.com)

**READY IS THE ONLY OPTION.**