




HELIX II HX01

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL

II

STANDARD	NIJ 0101.06
NIJ MODEL	UG2F06
SERIES	HX01
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	0.83 psf
THINNESS	0.18"
PLY COUNT	31
SIZE RANGE	C1-C5
COMPOSITION	Spectra Shield® /Goldshield® Hybrid
STITCHING	Shoulder Tack, Bottom Stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

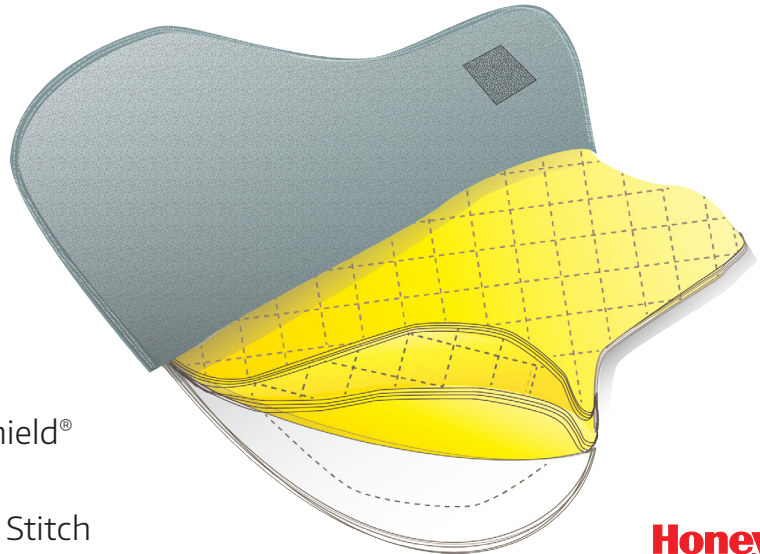

Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1748 fps	.357 Mag New V50	1648 fps
9mm Conditioned V50	1683 fps	.357 Mag Conditioned V50	1625 fps
9mm BFS	29.8 mm	.357 Mag BFS	34.4 mm
9mm New RPI	2106.0	.357 Mag New RPI	1985.5
9mm Conditioned RPI	2027.7	.357 Mag Conditioned RPI	1957.8



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.